







CHF BC - Options

Specifications are subject to change. If any tradesperson has questions regarding the attached specifications please contact your sales representative.

Param Sidhu

Sales Assistant

psidhu@trailappliances.com 604 928 4442

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances for this project to share all the attached specifications to ensure the cabinet provider, contractor, or any other tradesperson have all the information required to complete their work accurately.

RICHMOND • COQUITLAM • SURREY • VANCOUVER • CLOVERDALE • ABBOTSFORD • VICTORIA • KELOWNA • CLEARANCE CENTRE • OLYMPIC VILLAGE • NANAIMO • NORTH VANCOUVER

CHF BC - Options



Contents	Page no.
BRFB1532SS Blomberg Refrigeration	6-8
28" Built-In Bottom Freezer Refrigerator	
BRFB21612SS Blomberg Refrigeration	9-10
30 Inch Counter Depth Bottom-freezer Refrigerator	
LBNC12231W LG Refrigeration	11-12
12 cu.ft. Bottom Freezer Refrigerator, 24" Wide	
LT11C2000V LG Refrigeration	13-14
11 cu.ft. Top Mount Refrigerator	
LT18S2100S LG Refrigeration	15
28" 18 cu. ft. Top Mount Refrigerator	
LBNC15251V	16-17

Trail Appliances

trailappliances.com

Param Sidhu

Sales Assistant 604 928 4442

Proposal **20250806162619278SC** Version 1.1

Wed, Aug 6, 2025 9:26 AM PDT



enterprise.steelcod.com/sp/tral/RBVT1R2X

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Full Spec Package

LG Refrigeration

15 cu.ft. Bottom Freezer Refrigerator, 28" Wide

LRDNS2200W LG Refrigeration	18-22
30" Bottom Freezer Drawer Refrigerator, 22 cu.ft.	
LRDNS2200S LG Refrigeration	23-27
30" Bottom Freezer Drawer Refrigerator, 22 cu.ft.	
RT18DG6300SR Samsung Refrigeration	28-29
18 cu. ft. Top-Mount Refrigerator with SmartThings Ready	
RB15DG6000SR Samsung Refrigeration	30-31
15 cu. ft. Counter-depth Bottom-Mount Refrigerator	
MFF123W Stirling Marathon Refrigeration	32
Mid-sized Frost Free Refrigerator	
MER241W-2 Stirling Marathon Range	33
24" Electric Range	
MER245W-2	34

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Full Spec Package

Stirling Marathon Range	Stirling	Marathon	Range
-------------------------	----------	----------	-------

24" Electric Range With Schott Ceran Smooth Top

MSCER3080SS Stirling Marathon Range	35
30" Stainless Steel Smooth Top Electric Range	
NE63A6111SS Samsung Range	36-37
6.3 cu.ft. Freestanding Electric Range with Wi-Fi	
LREL6321S LG Range	38-39
6.3 cu ft. Smart Wi-Fi Enabled Electric Range with EasyClean®	
DWT52600WIH Blomberg Dishwasher	40-41
24" Tall Tub Front Control Dishwasher	
LDFC2423W LG Dishwasher	42
Front Control Dishwasher with SenseClean™	
DWT25504SS Blomberg Dishwasher	43-44
24" Front Control Dishwasher	
DW80CG4021SR	45-46

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.

Full Spec Package

Samsung Dishwasher

Fingerprint Resistant 53 dBA Dishwasher with Adjustable Rack

Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only.





28 INCH BUILT-IN BOTTOM FREEZER REFRIGERATOR

BRFB1532SS





Duo-Cycle Cooling



Ingenious Blomberg refrigerators are equipped with advanced multi-cycle, no-frost, silent cooling technology. Independently zoned and controlled cooling systems maintain even air temperature and humidity in separate freezer and fresh-food compartments, delivering enhanced food preservation and maximum energy efficiency. No air transfer between compartments means food in the freezer section freezes faster, items in the refrigerator stay fresher longer, and odors don't circulate.

Digital Display

Blomberg refrigerators feature bright, accessible digital displays that simplify programming and put you in control of performance.



Flexi-rack

Featured in certain Blomberg refrigerators, this versatile chrome bottle holder suspends from a shelf to provide convenient extra storage. Ideal for chilling wine or keeping tall bottles of cold water on hand, this practical accessory makes the most of every inch of space.

GE	NERAL
Cooling system	Duo Cycle Frost Free Cooling
Control system	Electronic Control
Reversible Door	Yes
CAF	PACITIES
Total net volume, cu. ft.	14.0
Fresh food net volume, cu. ft.	9.97
Freezer net volume, cu. ft.	4.03
FRIDGE	FEATURES
Electronic control display type	Inner Digital Display
Auto defrost	Yes
Inner illumination	LED - Side walls
Door open alarm	Yes
Shelves	3 - Full depth, height adjustable
Crispers	1
Door Racks - Full width	3
Compressor	Variable Speed VCC
FREEZE	R FEATURES
Auto defrost	Yes
Freezer Drawers	3
Ice cube tray	No
TECHNICAL	INFORMATION
Supply voltage, V/Hz	120/60
Rated Current, A	1.25
Noise level, dBA	40
DIME	ENSIONS
HxWxD, in	67 3/4" x 27 9/16" x 26 3/8"
Product weight, lbs.	158
HxWxD, mm	1719.4 x 700 x 670.5
Product weight, kg	72
PERF	ORMANCE
Energy Star qualified	Yes
Climatic class T	Т
Annual energy consumption, kwh/yea	ar 327
Cooling Gas	R600a












28 INCH BUILT-IN BOTTOM FREEZER REFRIGERATOR

BRFB1532SS

Dimensions and Installation

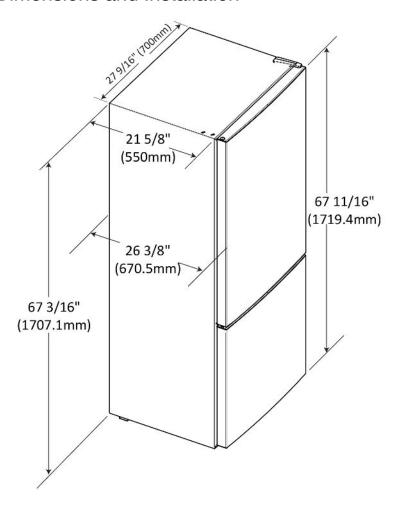



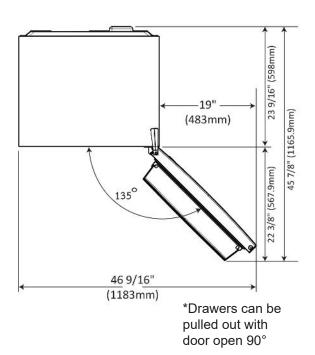


NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website www.blombergappliances.com or call 888-352-2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.






28 INCH BUILT-IN BOTTOM FREEZER REFRIGERATOR

BRFB1532SS

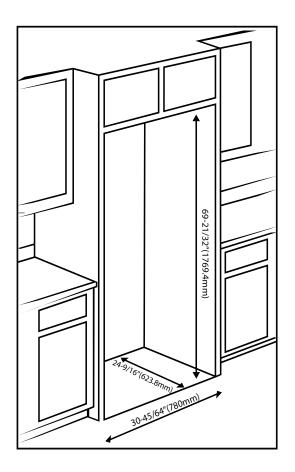

Electrical



Required Minimum Clearances:

Top: 2"

Sides: 1 37/64" on each side

Back: 2"





30 INCH COUNTER DEPTH BOTTOM-FREEZER REFRIGERATOR

BRFB21612SS







GE1	VERAL
Cooling system	Frost Free Cooling
Control system	Electronic Control
Reversible door	Yes
Finish	Smudge free, fingerprint resistant Stainless Steel
CAPA	ACITIES
Total net volume, cu. ft.	16.1
Fresh food net volume, cu. ft.	10.89
Freezer net volume, cu. ft.	5.22
FRIDGE	FEATURES
Blue light technology	Yes
Electronic control display type	Digital display on ceiling
Auto defrost	Yes
Inner illumination	LED-Ceiling
Shelves	2 - Safety Glass
Crispers	2
Door Racks	5 (4 half-width, 1 full)
Sabbath Mode	Yes
Compressor	Variable Speed VCC
FREEZER	FEATURES
Auto defrost	Yes
Freezer drawers	1
TECHNICAL	INFORMATION
Supply voltage, V/Hz	120V/ 60Hz
Rated current, A	2.0
Noise level, dBA	44
DIME	NSIONS
HxWxD, in	69 11/16" x 29 3/4" x 27 9/16"
Product weight, lbs.	188
HxWxD, cm	177 x 75.6 x 700
Product weight, kg	85
PERFO	RMANCE

Yes

R600a

T 347

Energy Star qualified

Annual energy consumption, kwh/year

Climatic class

Cooling Gas










30 INCH COUNTER DEPTH BOTTOM-FREEZER REFRIGERATOR


BRFB21612SS

Dimensions and Installation

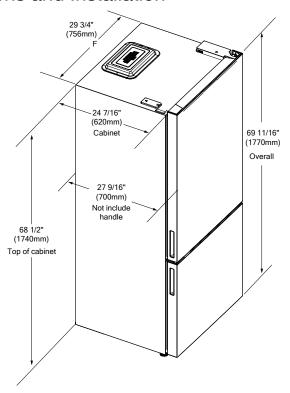







Required Minimum Clearances:

Top: 2"

Sides: $^{1}/^{2}$ " on each side

Back: 1 3/16"

NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website www.blombergappliances.com or call 888-352-2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.



CAPACITY

LG REFRIGERATION



LBNC12231

12 cu.ft. Bottom Freezer Refrigerator, 24" Wide

11.9 cu.ft.

Inverter Linear Compressor with 10-Year Warranty
Reversible Door
Door Cooling+
Express Cooling & Express Freezing
Multi-Air Flow™ Technology
SmartDiagnosis™
Ceiling LED Refrigerator Lighting
ENERGY STAR® Qualified
Available in Platinum Silver & White





CAPACITY	
Refrigerator (cu.ft.)	8.2
Freezer (cu.ft.)	3.7
Total (cu.ft.)	11.9
FEATURES	
Energy Consumption (kWh/Year)	402
ENERGY STAR® Qualified	Yes
WATER & ICE SYSTEM	
Ice System	Twist Ice Tray
COOLING	
Inverter Linear Compressor	Yes
Multi-Air Flow	Yes
Temperature Sensors	4
CONVENIENCE	
Display Type	Membrane (White LED)
Temperature Controls	Electronic/Digital
Door Alarm	Yes
Vacation Mode	Yes
Flat Duct	Yes
LoDecibel™ Quiet Operation	Yes
SmartDiagnosis™	Yes
REFRIGERATOR	
No. of Shelves	2 Full
Folding Shelf	No
Shelf Construction	Tempered Glass
Crisper Bins	2 Humidity Crisper
Refrigerator Light	1 Ceiling LED
REFRIGERATOR DOOR	
Door Type	Swing Door (Reversible)
No. of Bins	3
Door Bin Construction	1 Piece (Clear)
FREEZER	
Door Type	Swing Door
Drawers	3 Drawers

Door Reversible	Yes
Drawer Divider	No
Freezer Light	No
Freezer Handle	Horizontal Pocket Type
MATERIALS AND FINISHES	
Contour Door	Yes
Hidden Hinges	Yes
Surface	Smooth
Back	Flush & Metal Cover Over Mechanical Parts
Handles	Vertical Pocket Type
Available Colors	Platinum Silver, White
DIMENSIONS/CLEARANCES/WEIGHTS	
Depth with Handles	26 6/7"
Depth without Handles	26 6/7"
Depth without Door	24 1/5"
Depth (Total with Door Open)	44 1/2"
Height to Top of Case	73 2/9"
Height to Top of Door Hinge	73 2/9"
Width	23 3/7"
Width (Door Open 90° with Handle)	39 1/6"
Width (Door Open 90° without Handle)	39 1/6"
Door Edge Clearance with Handle	2"
Door Edge Clearance without Handle	2"
Installation Clearance	2"
Weight (Unit/Carton)	154.3 lbs / 172.0 lbs
Carton Dimensions (WxHxD)	25 5/8" x 76 8/9" x 30"
LIMITED WARRANTY	
Parts & Labor	1 Year
Sealed System (Parts & Labor)	7 Years
Linear Inverter Compressor (Parts Only)	10 Years
UPC CODES	
LBNC12231V (Platinum Silver PCM)	772454071317
LBNC12231W (White)	772454071324

LG REFRIGERATION

LBNC12231_

12.cu.ft. Bottom Freezer Refrigerator, 24" Wide

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS/CLEARANCES/WEIGHTS	
A Depth without Handles	26 6/7"
B Width	23 3/7"
C Height to Top of Case	73 2/9"
D Height to Top of Door Hinge	73 2/9"
E Back Clearance	4/8"
F Depth without Door	24 1/5"
G Depth (Total with Door Open 90°)	44 1/2"
M Depth with Handles	26 6/7"
Installation Clearance	Top 4/8", Back 4/8"
Carton Dimensions (WxHxD)	25 5/8" x 76 8/9" x 30"
ENERGY	
Energy Consumption (kWh/Year)	402
ENERGY STAR® Qualified	Yes
CEE Tier	1

CHOOSING THE PROPER LOCATION

WATER

Select a place where a water supply can be easily connected for the automatic

NOTE

• The water pressure must be 20-120 psi or 138-827 kPa or 1.4-8.4 kgf/cm². If the refrigerator is installed in an area with low water pressure (below 20 psi), you can install a booster pump to compensate for the low pressure.

ELECTRICITY

The refrigerator should always be plugged into its own individual properly grounded electrical outlet rated for 115 Volts, $60\,Hz$, AC only, and fused at 15 or 20 amperes. This provides the best performance and also prevents overloading house wiring circuits which could cause a fire hazard from overheated wires. It is recommended that a separate circuit serving only this appliance be provided.

WARNING

To reduce the risk of electric shock, do not install the refrigerator in a wet or damp area.

FLOORING

To avoid noise and vibration, the unit must be leveled and installed on a solidly constructed floor. If required, adjust the leveling legs to compensate for the unevenness of the floor. The front should be slightly higher than the rear to aid in door closing. Leveling legs can be turned easily by tipping the cabinet slightly. Turn the leveling legs to the left to raise the unit or to the right to lower it.

NOTE

 Installing on carpeting, soft tile surfaces, a platform or weakly supported structure is not recommended.

AMBIENT TEMPERATURE


Install this appliance in an area where the temperature is between $55^{\circ}F$ ($13^{\circ}C$) and $110^{\circ}F$ ($43^{\circ}C$). If the temperature around the appliance is too low or high, cooling ability may be adversely affected.









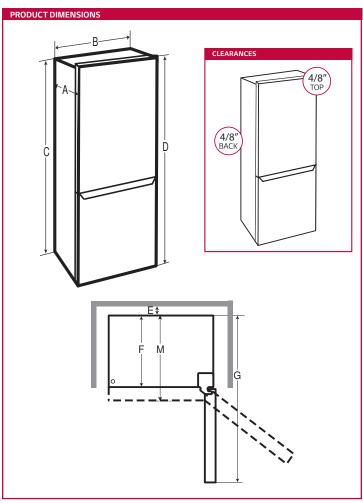


CONNECTING POWER AND SECURING SPACE FOR WATER SUPPLY PIPE

Make sure the location of the water supply pipe is within the marked range.

Before connecting the power, always make sure to ground the product. (If the product is not grounded, the user may be able to feel the electricity due to the minute leakage current when touching the refrigerator door handle or side corner even when there is no issue with the product.)


Do not ground the product to gas pipe, plastic water pipe or telephone wire etc. It can cause electric shock and explosion.



Power connection

The location of the 115V 60Hz power connector must be located on the rear side of the product as shown in the picture.

When installing the product, make sure to check whether the cord is hung on the hook on the rear side so that it is not pressed on the refrigerator. Damaged power cord can cause a fire.



Installation space for water supply pipe

Place the water hose for ice maker and water dispenser as shown in the picture, and prepare hose to come up from the floor. (Copper pipe with diameter of 5/16"(8mm) is recommended for the water hose.) If the water pipe and water hose is located far from the product, bury the water hose on the floor and provide appropriate treatment.

LG REFRIGERATION

Life's Good

LT11C2000V

11 cu.ft. Top Mount Refrigerator

11 cu.ft.24" WideFlat Door DesignEnergy Star Certified

AVAILABLE COLORS



STAINLESS STEEL LOOK




CAPACITY	
Refrigerator (cu. ft.)	8.3 cu. ft.
Freezer (cu. ft.)	2.8 cu. ft.
Total Capacity (cu. ft.)	11.1 cu. ft.
ENERGY	
ENERGY STAR® Qualified	Yes
Energy Consumption (kWh/Year)	291
COOLING	
Compressor Type	Smart Inverter Compressor
Evaporator	1
Multi Air Flow Cooling	Yes
Temperature Sensors	2
Refrigerant [Name / Amount]	R600a / 66g / 2.33oz
DISPLAY & ETC.	
Display Type	Knob Dial
Temperature Controls	Electronic/Digital
REFRIGERATOR	
No. of Shelves	3 (2 Fixed + 1 Sliding)
Shelf Trim	White
No. of Crisper Bins	1
Light	Yes

REFRIGERATOR DOOR	
No. of Bins	3
Door Shape	Flat
Handle Type	Pocket
FREEZER	
Door Type	Flat
Handle Type	Pocket
Drawers / Shelves	1
No. of Door Bins / Construction	2
MATERIALS AND FINISHES	
Hidden Hinges	Yes
Toe Grille	Yes
Available Colors	Stainless Steel Look (VCM)
Insulation	Low GWP and Zero ODP Blowing Agent

DIMENSIONS/CLEARANCES/W	EIGHTS
Product (W x H x D)	23 5/8" x 64 5/8" x 28"
Width	23 5/8"
Height	64 5/8"
(to Top of Hinge or Door cap Décor)	04 3/6
Depth (with Handles)	28"
Width	24 5/8"
(Door Open 90° without Handle)	24 3/6
Width	24 5/8"
(Door Open 90° with Handle)	
Width	40 3/8"
(Door Fully Open without Handle)	
Case Edge Clearance (Door Fully Open)	17"
Door Edge Clearance without Handle	1 1/4"
	63 [(0"
Height to Top of Case	63 5/8"
Depth without Door	24 5/8"
Depth without Handles	28"
Depth (to Hinge Cover)	18 3/4"
Depth (Total with 90° Door Open)	49 3/8"
Installation Clearance	Sides 2", Top 2", Back 2"
Carton Dimensions (WxHxD)	25 1/8" x 67 3/4" x 29 3/4"
Weight (Unit/Carton)	128lbs. / 139 lbs.
LIMITED WARRANTY	
Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear Compressor (Parts & Labor)	6 - 10 Years
UPC CODES	
LT11C2000V (Stainless Steel Look)	195174065129

Dimensions and Clearances

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 2 inches (50 mm) between the back of the refrigerator and the wall.
- Remember to allow enough room in front of the refrigerator to fully open the doors.



-	Dimensions/Clearances	LT11C2000*
Α	Depth without Handle	28" (710 mm)
В	Width	23 5/8" (600 mm)
С	Height to Top of Case	63 5/8" (1616 mm)
D	Height to Top of Hinge	64 5/8"(1640 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	24 5/8" (624 mm)
G	Depth (Total with Door Open 90°)	49 3/8" (1253 mm)

Leveling


Leveling the Refrigerator

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or sideto side. If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

1 Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.

NOTE

· A flare nut wrench works best, but an open-end wrench will suffice. Do not over-tighten.





LG Refrigeration

Capacity

Reversible door No. of bins

Handle type

Door construction

LT18S2100S 6

28" 18 cu.ft. top mount refrigerator





No. of shelves Door bin construction





Refrigerator (cu. ft.)	13 cu. ft.
Freezer (cu. ft.)	4.5 cu. ft.
Total capacity (cu. ft.)	17.5 cu. ft.
Energy	
ENERGY STAR® Certified	Yes
Energy consumption (kWh/ Year)	344
Compressor type	Smart inverter compressor
Water & Ice System	
Automatic ice maker	Ice maker ready/ optional LK50C
Ice storage capacity	6.6 lbs.
Daily ice production	2.2 lbs.
Ice maker manual	1 Level 1 tray
Convenience	
Display type	Knob dial
Temperature controls	Electronic/manual
LoDecibel™ quiet operation	Yes
Refrigerator	
Product type	Top mount
Refrigerator light	Yes
Shelf trim	White décor
No. of shelves	2 Fixed
Refrigerator Door	

3 (2 Gallon, 1 half)

Flat

Pocket

Shelf construction	Tempered glass
Door type	Side swing
Materials and Finishes	
Door finish	Stainless steel
Handle type	Pocket (black décor)
Contour door	Flat
Fingerprint & smudge resistant exterior	Yes
Dimensions/Clearances/We	ight
Depth with handles	33 3/4"
Depth without handles	33 3/4"
Depth without door	29 3/4"
Depth (total with door open)	58 1/4"
Height to top of case	64"
Height to top of door hinge	65"
Width	27 1/2"
Width (door open 90° with handle)	29 1/4"
Width (door open 90° without handle)	29 1/4"
Door edge clearance with handle	1 3/4"
Door edge clearance without handle	1 3/4"
Installation clearance	1 3/4"
Weight (product/carton)	161 lbs. / 174.2 lbs.
Product dimensions (W x H x D)	27 1/2" x 65" x 33 3/4"
Carton dimensions (W x H x D)	28 3/4" x 67 1/2" x 28 3/4"

Lilling Wallanty	
Parts & labour	1 Year
Sealed system (parts only)	7 Years
Compressor (parts only) UPC Codes	10 Years
LT18S2100S	195174071205

Limited Warranty

LG REFRIGERATION

ENERGY STAR® Qualified

LBNC15251V

15 cu.ft. Bottom Freezer Refrigerator, 28" Wide

14.7 cu.ft.

Inverter Linear Compressor with 10-Year Warranty
Door Cooling+
Ceiling LED Refrigerator Lighting
3 Full Glass Shelves (1 Sliding)
Multi-Air Flow™ Technology
SmartDiagnosis™
Twist Ice Tray in the Freezer

Available in Matte Black & Platinum Silver





CAPACITY	
Refrigerator (cu.ft.)	10.0
Freezer (cu.ft.)	4.7
Total (cu.ft.)	14.7
FEATURES	
Energy Consumption (kWh/Year)	425
ENERGY STAR® Qualified	Yes
WATER & ICE SYSTEM	
Ice System	Twist Ice Tray
COOLING	
Inverter Linear Compressor	Yes
Multi-Air Flow	Yes
Temperature Sensors	4
CONVENIENCE	
Display Type	Membrane (White LED)
Temperature Controls	Electronic/Digital
Door Alarm	Yes
Child Lock	No
Flat Duct	Yes
LoDecibel™ Quiet Operation	Yes
SmartDiagnosis™	Yes
REFRIGERATOR	
No. of Shelves	3 Full (1 Folding)
Folding Shelf	1
Shelf Construction	Tempered Glass
Crisper Bins	1 Humidity Crisper
Refrigerator Light	1 Ceiling LED
REFRIGERATOR DOOR	
Door Type	Swing Door (Reversible)
No. of Bins	6 Total (2 Full, 4 Half)
Door Bin Construction	1 Piece (Clear)
FREEZER	
Door Type	Swing Door (Reversible)
Drawers	3 Drawers

DuraBase™ Solid Drawer Base	No
Drawer Divider	No
Freezer Light	No
Freezer Handle	Horizontal Pocket Type
MATERIALS AND FINISHES	
Contour Door	Yes
Hidden Hinges	Yes
Surface	Smooth
Back	Flush & Metal Cover Over Mechanical Parts
Handles	Vertical Pocket Type
Available Colors	Matte Black, Platinum Silver
DIMENSIONS/CLEARANCES/WEIGHTS	
Depth with Handles	-
Depth without Handles	27 3/8"
Depth without Door	23 3/8"
Depth (Total with Door Open)	51 6/8"
Height to Top of Case	67 6/8"
Height to Top of Door Hinge	67 6/8"
Width	27 3/8"
Width (Door Open 90° with Handle)	29 6/8"
Width (Door Open 90° without Handle)	29 6/8"
Door Edge Clearance with Handle	4/8"
Door Edge Clearance without Handle	4/8"
Installation Clearance	4/8"
Weight (Unit/Carton)	167.6lbs / 185.2lbs
Carton Dimensions (WxHxD)	29.3" x 69.8" x 30.8"
LIMITED WARRANTY	
Parts & Labor	1 Year
Sealed System (Parts & Labor)	7 Years
Linear Inverter Compressor (Parts Only)	10 Years
UPC CODES	
LBNC15231P (Matte Black PCM)	772454071607
LBNC15251V (Platinum Silver PCM)	195174002582

Dimensions and Clearances

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 33 ½ inches (850 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.





-	List	LBNC15231* LBNC15241* LBNC15251*
Α	Depth without handle	27 5/8" (700 mm)
В	Width	27 5/8" (700 mm)
С	Height to Top of Case	66 1/8" (1680 mm)
D	Height to Top of Hinge	67 3/4" (1720 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	23 3/8" (595 mm)
G	Depth (Total with Door Open 90°)	51 3/4" (1315 mm)
К	Front Clearance	33 1/2" (850 mm)



LRDNS2200W

30" Bottom Freezer Drawer Refrigerator, 22 cu.ft.



- 22 cu.ft
- Mutli-Air Flow System
- Door Cooling+
- Smudge Resistant Finish
- Energy Star® Qualified
- Reversible Door

CAPACITY

22.1 cu.ft.

MEASUREMENTS (WXHXD)

29 3/4" x 68 1/2" x 34 7/8"

Series	LG
Туре	Bottom Freezer
Width	30"
Standard Depth	Yes
CAPACITY	
Refrigerator	14.8 cu. ft.
Freezer	7.3 cu.ft.
Total	22.1 cu.ft.
ENERGY	
Energy Consumption (kWh/year)	505
Energy Consumption (kWh/year) ENERGY STAR® Qualified	505 Yes
ENERGY STAR® Qualified	
ENERGY STAR® Qualified COOLING	Yes
ENERGY STAR® Qualified COOLING Smart Inverter Compressor	Yes
ENERGY STAR [®] Qualified COOLING Smart Inverter Compressor Multi-Air Flow™ System	Yes Yes
ENERGY STAR® Qualified COOLING Smart Inverter Compressor Multi-Air Flow™ System Digital Temperature Controls	Yes Yes Internal LED

Door Alarm	Yes

REFRIGERATOR

No. of Shelves	2 Full Shelves
Cantilevered Shelves	Hybrid
Shelf Construction	Spill Protector Tempered Glass
Crisper Bins	2 Humidity Crispers
Glide N' Serve™ Drawer	Yes
Refrigerator Light	Ceiling LED

REFRIGERATOR DOOR

No. of Bins	5 Door Bins (2 Gallon, 1 Dairy, 1 Folding, 1 Half)
Door Bin Construction	1 Piece (Clear)
Folding Door Bin	Yes

FREEZER

Drawers	2
Divider	Yes (Lower)
Ice Maker	Ready (LK55C)
Freezer Light	Ceiling LED

MATERIALS AND FINISHES

Foam Door Insulation	Cyclo Pentane (No CFC, No HCFC)
Contour Door	Yes
Hidden Hinge	Yes
Surface	Coated Metal, Stainless Steel
Back	Flush & Metal Cover Over Mechanical Parts
Available Colours	Stainless Steel, White Smudge Resistant
Handles	Matching Commercial Handles

DIMENSIONS/CLEARANCES/WEIGHT

Depth with Handles	34 7/8"
Depth without Handles	33"
Depth without Door	29"
Depth (Total with Door Open)	59 1/2"
Height to Top of Case	67 1/4"
Height to Top of Door Hinge	68 1/2"
Width	29 3/4"
Width (Door Open 90° with Handle)	33 1/2"
Width (Door Open 90° without Handle)	31 1/2"
Door Edge Clearance with Handle	4 1/4"
Door Edge Clearance without Handle	2"
Installation Clearance	Sides 1/8", Top 1", Back 1"

Weight (Unit/Carton)	231lbs./ 252 lbs.
Carton Dimensions (WxHxD)	31 1/2" x 69 3/8" x 37 3/4"
WARRANTY	
1 Year parts and Labor	Yes
7 years on the Sealed System	Yes
10 Year on Compressor	Yes
UPC CODES	

195174028353

LRDNS2200W



LRDNS2200S

30" Bottom Freezer Drawer Refrigerator, 22 cu.ft.



SUMMARY

CAPACITY

22.1 cu.ft.

MEASUREMENTS (WXHXD)

29 3/4" x 68 1/2" x 34 7/8"

Series	LG
Туре	Bottom Freezer
Width	30"
Standard Depth	Yes
CAPACITY	
Refrigerator	14.8 cu. ft.
Freezer	7.3 cu.ft.
Total	22.1 cu.ft.
ENERGY	
Energy Consumption (kWh/year)	505
ENERGY STAR® Qualified	Yes
COOLING	
Smart Inverter Compressor	Yes
Multi-Air Flow™ System	Yes
Digital Temperature Controls	Internal LED
Digital Temperature Sensors	4
CONVENIENCE	
Temperature Controls	Electronic/Digital

Door Alarm	Yes

REFRIGERATOR

No. of Shelves	2 Full Shelves
Cantilevered Shelves	Hybrid
Shelf Construction	Spill Protector Tempered Glass
Crisper Bins	2 Humidity Crispers
Glide N' Serve™ Drawer	Yes
Refrigerator Light	Ceiling LED

REFRIGERATOR DOOR

No. of Bin	5 Door Bins (2 Gallon, 1 Dairy, 1 Folding, 1 Half)
Door Bin Construction	1 Piece (Clear)
Folding Door Bin	Yes

FREEZER

Drawers	2
Divider	Yes (Lower)
Ice Maker	Ready (LK55C)
Freezer Light	Ceiling LED

MATERIALS AND FINISHES

Foam Door Insulation	Cyclo Pentane (No CFC, No HCFC)
Contour Door	Yes
Hidden Hinges	Yes
Surface	Coated Metal, Stainless Steel
Back	Flush & Metal Cover Over Mechanical Parts
Available Colors	Stainless Steel, White Smudge Resistant
Handles	Matching Commercial Handles

DIMENSIONS/CLEARANCES/WEIGHT

Depth with Handles	34 7/8"
Depth without Door	29"
Depth (Total with Door Open)	59 1/2"
Height to Top of Case	67 1/4"
Height to Top of Door Hinge	68 1/2"
Width	29 3/4"
Width (Door Open 90° with Handle)	33 1/2"
Width (Door Open 90° without Handle)	31 1/2"
Door Edge Clearance with Handle	4 1/4"
Door Edge Clearance without Handle	2"
Carton Dimensions (WxHxD)	31 1/2" x 69 3/8" x 37 3/4"
Installation Clearance	Sides 1/8", Top 1", Back 1"

Depth without Handles	33"
Weight (Unit/Carton)	231lbs./ 252 lbs.
WARRANTY	
1 Year parts and Labor	Yes
7 Years on the Sealed System	Yes
10 Years on Compressor	Yes
UPC CODES	

195174028346

LDNS22220S

RT18DG6300SRAC

SAMSUNG

18 cu. ft. Top-Mount Refrigerator with SmartThings Ready



Signature Features

SmartThings AI Energy

Monitor your energy usage with AI Energy mode in SmartThings Energy.

All-Around Cooling

Cools evenly from corner to corner.

Digital Inverter Compressor

Automatically adjusts its speed to optimize cooling and reduce overwork.

Available Colour



Fingerprint Resistant Stainless Steel



All-Around Cooling



Extra-Large Flexible Storage

Features

- LED Lighting
- Gallon Door Bin
- Glass Shelf
- ADA Compliant
- Wi-Fi Enabled
- Power Cool & Power Freeze
- Door Alarm

• Al Energy Mode

- All-Around Cooling
- Sabbath Mode
- Extra-Large Flexible Storage
- 2 Crisper Drawers
- No Frost

Rating



- ENERGY STAR® Rated
- Energy Consumption (annual) = 634 kWh/yr

RT18DG6300SRAC


SAMSUNG

18 cu. ft. Top-Mount Refrigerator with SmartThings Ready


Installation Specifications

- 1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
- 2. Refer to illustration below to determine dimensions.
- 3. Allow 15 1/4" of clearance on hinge side of refrigerator when installing next to a wall
- 4. Allow clearance (more than 2" recommended) at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at top and for ease of installation.
- 5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.
- 6. For optimal usage and ability to open refrigerator doors completely, do not install next to a wall.

Please note: The following dimensions and cutout information is for planning purposes only. For complete installation details, consult manual packed with product or download manual online at samsung.com.



Dimensions

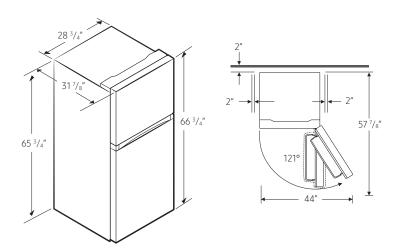

Total Capacity: 17.5 cu. ft.

Refrigerator: 12.7 cu. ft.

3 Tempered Glass Spill-Proof Shelves

2 Clear Crisper Drawers

3 Door Bins with 2 Gallon Door Bins and 1 Dairy Bin

LED Lighting

Fridge in Freezer: 4.9 cu. ft.

1 Glass Shelf

2 Door Bins

Volt/Amps	115V / 60Hz / 3.5A
Power Cord Length	2 Meters

Warranty

One (1) Year Parts and Labour on Refrigerator Ten (10) Years Parts on Digital Inverter Compressor

Product Dimensions & Weight (WxHxD)

Dimensions (WxHxD with hinges, handles and doors):

28 ³/₄" x 66 ³/₄" x 31 ⁷/₈"

Dimensions (WxHxD without hinges and door):

28 ³/₄" x 65 ³/₄" x 28 ¹/₂" Weight: 167.6 lbs (76 kg)

Shipping Dimensions & Weight (WxHxD)

Dimensions: 30 1/8" x 70 5/8" x 33 1/2"

Weight: 183 lbs (83 kg)

Colour Model # UPC RT18DG6300SRAC 887276842172

Fingerprint Resistant

Stainless Steel

SAMSUNG

15 cu. ft. Counter-depth Bottom-Mount Refrigerator



Available Colour



Stainless Steel Finish

Signature Features

All-Around Cooling

An All-Around Cooling system cools the entire fridge evenly from corner to corner. It continually checks the temperature and circulates cool air through strategically placed vents.

SmartThings Connectivity

Monitor and manage the refrigerator's performance from your smartphone using it's embedded WiFi and SmartThings App*.

* Available on Android and iOS devices. A Wi-Fi connection and a Samsung account are required.

Energy Star® Certified

Eco-friendly and energy-efficient.

Digital Inverter Compressor

Automatically adjusts its speed in response to cooling demand across 7 levels. As a result, it's much quieter and uses up to 50% less power.



SmartThings Connectivity



Digital Inverter Compressor

Features

- 4 Shelves
- Counter-Depth
- Crisper
- 5 Door Bins
- High Efficiency LED Lighting
- Sabbath Mode

Convenience

- CoolTight Door
- Door Alarm
- All-Around Cooling
- Temperature Control
- Power Cool & Power Freeze
- Wi-Fi Embedded
- Reversible Door
- Twist Ice Maker



ENERGY STAR® rated: 420 kWh/yr



RB15DG6000SRAA

SAMSUNG


15 cu. ft. Counter-depth Bottom-Mount Refrigerator

Installation Specifications


- Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
- 2. Refer to illustration below to determine dimensions.
- 3. Allow 13/4" of clearance on hinge side of refrigerator when installing next to a wall.
- 4. Allow 2" minimum clearance at rear for proper air circulation and water/ electrical connections. More than 1" recommended for clearance at sides and top for ease of installation.
- 5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.

For optimal usage and ability to open refrigerator doors completely, do not install next to a wall.

Please note: The following dimensions and cutout information is for planning purposes only. For complete installation details, consult manual packed with product or download manual online at samsung.com.



Dimensions

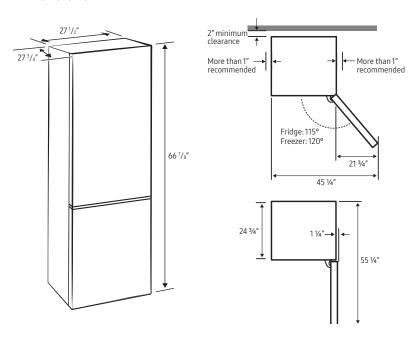

Total Capacity: 15 cu. ft.

Refrigerator: 10.6 cu. ft.

- 1 Humidity-Controlled Crisper
- 4 Tempered Glass Spill-Proof Shelves
- 5 Door Bins
- High Efficiency LED Lighting

Freezer: 4.4 cu. ft.

- 3 Drawer Dividers
- High Efficiency LED Lighting
- Twist Ice Maker

Consumption Rate	420 kWh/year
Volt/Amps	115V / 60Hz / 3.0A
Power Cord Length	2 Meters

Warranty

One (1) Year Parts and Labour on Refrigerator Ten (10) Years Parts on Digital Inverter Compressor

Product Dimensions & Weight (WxHxD)

Net Dimensions (WxHxD with hinges, handles and doors): $27^{1/2}$ " x $66^{7/8}$ " x $27^{3/4}$ "

Dimensions (WxHxD without hinges and door):

 $27 \frac{1}{2}$ " x 65 $\frac{5}{8}$ " x 27 $\frac{3}{4}$ " Net Weight: 158.75 lb (72 kg)

Shipping Dimensions & Weight (WxHxD)

Dimensions: $30^{9}/_{32}$ " x $70^{55}/_{64}$ " x $29^{9}/_{64}$ " Shipping Weight: 172 lb (78 kg)

ColourModel #UPCStainless LookRB15DG6000SRAA887276881409

Effective September 2024

Engineered to Perform





MFF123W

12 cu.ft. Deluxe Frost Free Refrigerator

- 1 2 full size freezer door rails
- 2 tempered glass shelves
- 3 Bright LED interior light
- 4 Multi-Air-Flow frost free operation
- 5 Chrome wine rack
- 6 Reversible door hinges
- 7 2 full width + 1 gallon door bins
- 8 Transparent twin crispers





	Features
Configuration	Top Mount Refrigerator
Total Capacity	12 cu.ft.
Defrost Type	Multi-Air-Flow Frost Free
Vegetable / Fruit Crisper	Transparent twin crispers
Wine rack	✓
Tempered Glass Shelves	2 adjustable tempered glass shelves
Reversible Door	✓
Interior Light	Bright and energy efficient LED interior Light
Colour	White (W)
Dimensions (WxDxH)	23 1/2" x 30"x 59 3/4"

STIRLING MARATHON

Elora, Ontario, Canada NOB 1SO www.stirlingmarathon.com







Engineered to Perform





MER241W-2

24" White Deluxe Electric Coil Range

- 1 Digital LED Clock & Display
- Porcelain up-swept lift-up cooktop
 2- 6 inch elements (1250W) (4 spirals)
 2- 8 inch elements (2100W) (5 spirals)
- 3 2 Heavy duty oven rack
- Durable metal door with stainless steel handle
- 2.7 cu.ft oven capacity with hidden bake element
- 6 Smooth glide storage drawer

Format

Cooktop Type

Element Power

Cooktop Surface

Timer

Cleaning

Burner-on Indicator Lights

Oven-on Indicator Light

Oven Capacity

Broil Element

Door and Window

Handle

Energy Rating

Inner Dimensions (WxDxH)

Dimensions (WxDxH)

Features

24" Freestanding range

Electric Coil

2-6" (1250W) 2-8" (2100W)

Porcelain Up-Swept lift-up cooktop

Digital LED Clock & Display

Easy clean with hidden bake element

✓

2.7 cu.ft. (76L)

Powerful 6-pass variable element

Durable metal door | Removable interior glass for easy cleaning

Stainless Steel Handle

487 kWh/y

18 1/2" X 16 1/8" X 15"

23 5/8" x 24" x 45 1/16"

STIRLING MARATHON Elora, Ontario, Canada NOB 1SO www.stirlingmarathon.com

STIRLING





- Engineered to Perform





MER245W-2

24" White Deluxe with SCHOTT CERAN® smooth top Range

- 1 Digital LED Clock & Display
- 2 Element power 2 x 6" (1500W) 2 x 8" (2000W)
- 2 Heavy duty oven rack
- Durable metal door with stainless steel handle
- 5 2.7 cu.ft oven capacity with hidden bake element
- 6 Smooth glide storage drawer

	Features
Format	24" Freestanding range
Cooktop Type	Radiant SCHOTT CERAN® smoothtop
Element Power	2 x 6" (1500W) 2 x 8" (2000W)
Timer	Digital LED Clock & Display
Cleaning	Easy Cleaning with Hidden Bake Element
Burner-on Indicator Lights	\checkmark
Oven-on Indicator Light	✓
Oven Capacity	2.7 cu.ft. (76L)
Broil Element	Powerful 6-pass variable element
Door and Window	Durable metal door Removable interior glass for easy cleaning
Colour	White (W)
Inner Dimensions (WxDxH)	18 1/2" X 16 1/8" X 15"
Dimensions (WxDxH)	23 5/8" x 24" x 45 1/16"

STIRLING MARATHON Elora, Ontario, Canada, NOB 1S0

www.stirlingmarathon.com







Engineered to Perform





MSCER3080SS

30" Stainless Steel Deluxe Smooth Top Range

- Smooth radiant cooktop
- Digital Control panel with clock and timer
- 2 cooking racks 1 telescopic rail extension rack
- Air fry feature & Basket
- True convection Selfclean
- 5 cu.ft oven capacity with hidden bake element
- Smooth glide storage drawer

SPECIFICATIONS

Oven

Electrical

30" Freestanding range **Format Oven Capacity** 5 cu.ft.

Cooktop Type Radiant smoothtop Digital LED Clock & Display Timer

Cooktop Surface Element- Right Front 5"/9" (2500W) **Element- Left Front** 9"/7"/5" (2300W) **Element- Right Rear** 6" (1200W) **Elements- Left Rear** 6" (1200W)

Middle Element 7" (100W)

Broil Element Powerful 8-pass (3600W) **Bake Element** Hidden Bake Element (2200W) Convection True Convection (2500W) Cleaning Self Cleaning

Air fry & basket **Oven Racks** 3 heavy Duty: 2 cooking racks + 1 telescopic rail extension rack

Rack Positions

120V/240V 60Hz/50Amps Dimensions

Inner Dimensions (WxDxH) 24 11/16" X 18 15/16" X 18 11/16" Dimensions (WxDxH) 29 15/16" x 25 13/16" x 36"

SAMSUNG

6.3 cu. ft. Freestanding Electric Range



Signature Features

Wi-Fi Connectivity and Voice Control

Monitor and control the oven using the SmartThings App¹. And control the oven with your voice using a voice assistant², such as Samsung Bixby³, Amazon Alexa or Google Assistant.

6.3 cu. ft. Capacity

Cook multiple dishes at once or accommodate larger items for the holidays.

Flexible Cooktop

Accommodates multiple pan sizes on 4 specialized elements with two dual elements.

Steam Clean

Steam clean heats the cavity to a high temperature to burn off grease and food residue.

Available Colour





6.3 cu. ft. Capacity



Powerful/Flexible Cooktop

Features

- Flexible Cooktop
 - Four Electric Elements
 - Two Dual Elements (6"/9") Rapid Boil
 - Two Single Elements (6")
- Wide View Window

- Hidden Bake Element
- Storage Drawer
- Sabbath Mode
- 2 Chrome Racks
- Flat Handle

Convenience

- Wi-Fi Connectivity and Voice Control
- Delay Bake
- Hot Surface Indicator Light
- Auto Oven Light
- · Kitchen Timer

¹Available on Android and iOS devices. A Wi-Fi connection and a Samsung account are required.


²A Wi-Fi connection is required.

³Bixby is Samsung's brand of artificial intelligence (AI) / Internet of Things (IoT) voice assistant. A Samsung account is required.

6.3 cu. ft. Freestanding Electric Range

Installation Specifications


IMPORTANT: To eliminate the risk of burns or fire caused by reaching over heated surface units, avoid having cabinet storage space located above the surface units. If you have cabinet storage space over the heating elements, you can reduce the risk by installing a range hood that projects horizontally a minimum of 5 inches beyond the bottom of the cabinets.



- * A minimum of 30" is required between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; a minimum of 24" is required if the bottom of the wood or metal cabinet is protected by not less than 1/4" of flame retardant millboard covered with not less than no.28 MSG of sheet steel, 0.015" of stainless steel, 0.024" of aluminum, or 0.020" of copper.
- ** A minimum of 15" is required between the countertop and the adjacent cabinet bottom.

Dimensions

CAUTION: This range has been designed to comply with the maximum allowable wood cabinet temperature of 194 °F (90 °C). Make sure the wall covering, countertops, and cabinets around the range can withstand the heat (up to 194 °F [90 °C]) generated by the range. If not, discolouration, delamination, or melting may occur.

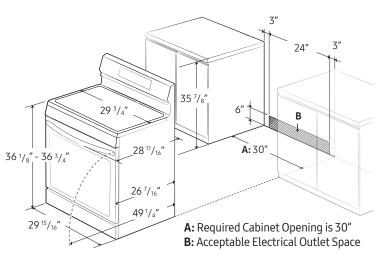

Radiant Ceramic Cooktop

Right Front: 6"/9" Dual Element, 3300W Left Front: 6"/9" Dual Element, 3300W

Right Rear: 6" Element, 1200W Left Rear: 6" Element, 1200W

Oven

Capacity: 6.3 cu. ft.

Hidden Bake Element: 2400W

Bake: 175°F–550°F Broil: Low/High, 3400W

Sabbath Mode

Storage Drawer

Capacity: 0.8 cu. ft.

Warranty

One (1) Year Parts and Labour

Product Dimensions & Weight (WxHxD)

Cavity Dimensions: 24 ¹³/₁₆" x 22 ⁷/₁₆" x 19 ³/₄"

Net Dimensions: $29^{15}/16$ " x $46^{5}/16$ " - $47^{1}/16$ " x $26^{7}/16$ "

Weight: 130.7 lbs (59.3 Kg)

Shipping Dimensions & Weight (WxHxD)

Dimensions: 33 ¹/₁₆" x 50 ⁹/₁₆" x 30 ⁵/₁₆"

Weight: 154.3 lbs (70 Kg)

ColourModel #UPC CodeStainless SteelNE63A6111SS887276509365

3	Specified Rating of Power- latts Supply-Cord Kit and Circuit Connection Opening		Plug Type	Power Cord Length		
120/240 Volts 3-Wire	120/208 Volts 3-Wire	Protection Amps	Power Cord	Conduit		
8750-16500	7801-12500	40 or 50 A	1 ³ /8"	11/8"	4 Prong	39.4"

A range cord rated at 40 amps with 125/250 minimum volt range is required. A 50 amp range cord is not recommended but if used, it should be marked for use with nominal 1 3/8" diameter connection openings. Care should be taken to center the cable and strain relief within the knockout hole to keep the edge from damaging the cable.

LG COOKING

LREL6321S

6.3 cu. ft. Smart Wi-Fi Enabled Electric Range with EasyClean®

6.3 cu. ft. Large Capacity EasyClean® LG ThinQ® App with ThinQ Care

AVAILABLE COLORS




STAINLESS STEEL



Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential ThinQ Care issues to find proactive solutions before problems arise.

 Avoid preventable repairs and service calls with real-time
 - diagnostics for a hassle-free experience.
 - Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



OVEN	
Oven Type	Single Oven
Oven Cooking System	Traditional
Oven Cleaning Type	EasyClean®
Oven Capacity (cu. ft.)	6.3
Broiler Element Power	4200W
Bake Element Power	3400W
Hidden Bake Element	Yes
Number of Rack Positions	7
Number of Oven Racks	2
Oven Rack Type	2 Standard
Drawer Type	Storage
Oven Modes	Bake, Broil, Easy Clean, Warm
Oven Light Type	Halogen
CONTROL FEATURES	
Kitchen Timer	Yes
Timed Cook	Yes
Oven Control Lock	Yes
Sabbath Mode	Yes
SMART FEATURES	
Wi-Fi	Yes
ThinQ Care	Yes
Smart Diagnosis™	Yes
Works with	LG ThinQ® Amazon Alexa Google Assistant SIDECHEF


POWER/RATINGS	
Amp Rating at 208V	47.3
Amp Rating at 240V	54.6
KW Rating at 208V	9.8
KW Rating at 240V	13.1
Required Power Supply Amp	40
DIMENSIONS & WEIGHT	
Cabinet Width (in.)	30"
Overall Depth (in.) - Including Handle	28 7/8"
Overall Height (in.)	46 1/2"
Overall Width (in.)	29 7/8"
Product Weight (lb)	157
Shipping Weight (lb)	181
Shipping Dimensions (W x H x D) (in.)	32 1/2" x 51" x 30 1/2"
POWER/RATINGS	
Amp Rating at 208V	47.3A
Amp Rating at 240V	54.6A
KW Rating at 208V	9.8kW
KW Rating at 240V	13.1kW
Required Power Supply (amp)	40A
UPC CODES	
LREL6321S (Stainless Steel)	048231341417
LKELD3215 (Stainless Steel)	048231341417

00	330 7 7 1	U U D
	-5-3	
100	The state of the s	

Dimensions and Clearances


NOTE

Important - Save for the use of the local electrical inspector.

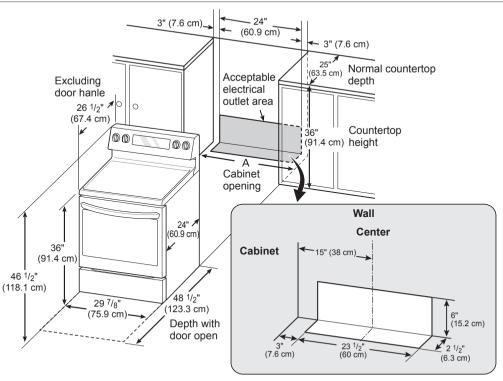

A = 30" (76.2 cm) For U.S.A = 30" (76.2 cm) ~ 31" (78.7 cm) For CANADA

For installation in Canada, a free-standing range is not to be installed closer than $^{15}/_{32}$ " (12 mm) from any adjacent surface.



Minimum Dimensions

^{* 30&}quot; (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (6.4 cm) flame retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.

^{** 15&}quot; (38.1 cm) minimum between countertop and adjacent cabinet bottom.





24" Tall Tub, Front Control Dishwasher

DWT52600 SERIES

Color Options: DWT52600SSIH Stainless Steel

DWT52600WIH White

DWT52600BIH Black







FEATURES

- Touch Control
- 6 Programs
- Silent Operation: 48 dBA
- Extra Rinse Function
- Sanitize Function
- Easy Installation
- Concealed Heating Element
- Adjustable Feet and Self-adjustable Hinge

FINISH


Fingerprint-free Stainless Steel

DIMENSIONS (H x W x D)

 $33^{7/8} \times 23^{9/16} \times 22^{7/16} in.$

	CONTROLS
Control Type	Electronic Touch Control
Position	Front
MA	AIN FEATURES
Loading Capacity (Place Settings)	14
Tub Material	Stainless Steel
DMFS Overflow Protection	Overflow Safety
5 Level Wash	Yes
Delay Timer	1/2 - 24 hours
Drying System	Static
Brushless DC™ Motor	Yes
Turbidity Sensor	Yes
Silent Operation	48 dBA
All-in-1 Tablet Function	Automatic
Detergent Dispenser Type	Sliding Lid
Interior High Loop with Air Gap	Yes
	FUNCTIONS
Half Load Function	Yes
Sanitize Function	Yes
Extra Rinse Function	Yes
RapidClean Function	Yes
	PROGRAMS
Number of Programs	6
Pots and Pans+ (167°F)	Yes
Regular Wash (142 – 145°F)	Yes
Express Dry	Yes
China/Crystal (149°F)	Yes
Quick Wash (131°F)	Yes
Rinse & Hold	Yes
ProCare	Yes
	DISPLAY
Rinse Aid Indicator	Yes
R	ACK SYSTEM
Cutlery Basket	Sliding
Upper Rack (Inset Shelves)	2
Adjustable Upper Rack	Fixed
Lower Basket Wine Glass Holder	Yes
Knife Accessory	Yes
DIMENSIO	ONS (DWT52600SSIH)
H x W x D	33 ⁷ / ₈ x 23 ⁹ / ₁₆ x 22 ⁷ / ₁₆ in. (86.1 x 59.8 x 57 cm)
Product Weight	83.33 lb. (37.8 kg)
Packed H x W x D	35 x 25 3/8 x 26 in. (88.9 x 64.4 x 66.1 cm)
Packed Weight	89.94 lb. (40.8 kg)
ENVIRON	MENTAL STANDARDS
ENERGY STAR® Qualified	Yes — Most Energy Efficient 2018
Energy Consumption	234 kWh / year
Water Consumption	3.5 – 5.0 gal. / cycle
ννατοι σοπουπρίτοπ	J 0.0 J.U yai. / Gyole



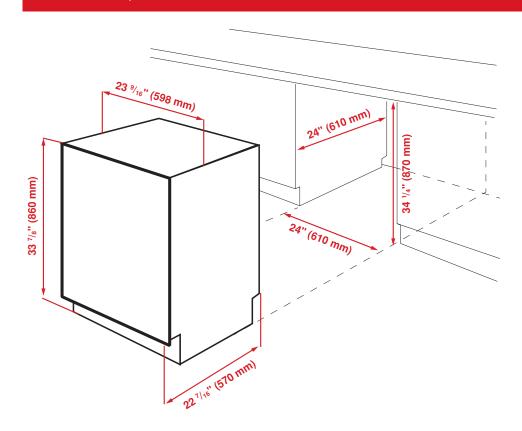

DIMENSIONS (DWT52600SSIH)	
HxWxD	33 ⁷ / ₈ x 23 ⁹ / ₁₆ x 22 ⁷ / ₁₆ in. (86.1 x 59.8 x 57 cm)
Product Weight	83.33 lb. (37.8 kg)
Packed H x W x D	35 x 25 3/8 x 26 in. (88.9 x 64.4 x 66.1 cm)
Packed Weight	89.94 lb. (40.8 kg)

DIMENSIONS (DWT52600BIH)		
H x W x D 33 ⁷ / ₈ x 23 ⁹ / ₁₆ x 22 ⁷ / ₁₆ in. (86.1 x 59.8 x 57 cm)		
Product Weight	82.89 lb. (37.6 kg)	
Packed H x W x D	35 x 25 3/8 x 26 in. (88.9 x 64.4 x 66.1 cm)	
Packed Weight	cked Weight 89.5 lb. (40.6 kg)	

DIMENSIONS (DWT52600WIH)		
HxWxD	33 ⁷ / ₈ x 23 ⁹ / ₁₆ x 22 ⁷ / ₁₆ in. (86.1 x 59.8 x 57 cm)	
Product Weight	83.55 lb. (37.9 kg)	
Packed H x W x D	35 x 25 3/8 x 26 in. (88.9 x 64.4 x 66.1 cm)	
Packed Weight 90.16 lb. (40.9 kg)		

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website at www.BlombergAppliances.com or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.

IN HARMONY WITH NATURE, YOUR LIFE, AND YOU.



OCI FEATURES

LG DISHWASHERS

Life's Good

LDFC2423

Front Control Dishwasher with SenseClean™

NeveRust™ Stainless Steel Tub

Dynamic Dry

AutoLeak Protection

Direct Drive Motor with 10-Year Limited Warranty

ENERGY STAR® Most Efficient 2023

AVAILABLE COLOURS







CAPACITY	
Total Place Settings	15
Upper Rack Dish Height Limit	9"
Lower Rack Dish Height Limit	12.5"
RACKS AND BASKETS	
Cutlery Baskets	Yes
Fold Down Tines	Yes (Half on Upper & Half on Lower)
BPA-Free Nylon Coated Racks and Tines	Yes
EasyRack™ Plus System	Yes
Height Adjustable	Manual
STYLE AND DESIGN	
Control Panel Location	Front Control
Control Panel Material	ABS
Touch Control	Yes
Tub Material	NeveRust™ Stainless Steel
Handle	Pocket Handle
All Available Colors	Platinum Silver, White
FEATURES	
Spray Arm	Yes
SenseClean™ Wash System	Yes
Vario Wash	Yes
Number of Spray Arms	3 (Top, Upper, Lower)
Detergent and Rinse-Aid Dispenser	Yes
Drying System	Dynamic Dry
Number of Wash Cycles	5 (Auto, Heavy, Normal, Turbo, Machine Clean)
Number of Options	6 (Flex Zone, High Temp, Extra Dry, Delay Start (Up to 12 Hours), Control Lock, Night Dry)
End of Cycle Indicator	Yes (Beeper + END indication on display)
Hidden Water Heater	Yes
Safety Float Switch (Leaks)	Yes
Soil (Turbidity) Sensor	Yes

LoDecibel™ Quiet Operation	52 dBA
Tub Insulation	Yes (Damping Sheet, Sound Absorbing Material (felt), Base)
BPA-Free Nylon Coated Racks and Tines	Yes
Anti-Bacterial Treatment (Drain hose)	Yes
Balanced Door	Yes
POWER RATINGS	
ENERGY STAR® Qualified	Yes
ENERGY STAR Most Efficient 2023	Yes
CEE Tier	1
Energy Use (kWh/Year)	238 kWh/Year
Water Use (Gallons/Cycle)	2.9
DIMENSIONS / CLEARANCES / WEIGHT	
Product Dimensions (in) (W x H x D)	23 3/4" x 33 5/8" x 24 5/8"
Min Height (Unit Dimensions)	33 5/8"
Max Height (Unit Dimensions)	36"
Product Weight	75.61 lbs.
Depth with Door Open (in)	49 1/4"
Water Connection (in)	90° 3/8" Compression Installed at Factory
Drain Hose End Sizes (in)	5/8" or 3/4" or 1"
Carton Dimensions (in) (W x H x D)	28 1/32" x 34 7/8" x 29 5/8"
Shipping Weight with Carton	88.8 lbs.
LIMITED WARRANTY	
Labor & Parts	1 Year
Control Board and Rack Parts	2 Years
Stainless Steel Door Liner or Tub	2 Years
Direct Drive Motor	10 Years
UPC CODES	
LDFC2423V (Platinum Silver)	772454075858
LDFC2423W (White)	772454075841





24 Inch Front Control Dishwasher

DWT25504SS






KEY FEATURES

- 14 Place Settings
- 5 Programs
- 48 dBA Silent Operation
- Flexible Rack Loading
- Fast Function
- 5 Level Wash

GENERAL	
Control Type	Electronic
Position	Front
Finish	Fingerprint-free Stainless Steel
MAIN FEA	
Loading Capacity	14
Tub Material	Stainless Steel
Inner Door Material	Stainless Steel
DMFS Overflow Protection	Yes
5 Level Wash with Spray Arm	Yes
Delay Timer Up to 1-24 hours	Yes
3-way Filtration	Yes
Drying	Condensation
Brushless DCTM Motor	Yes
Turbitity Sensor	Yes
Silent Level, dBA	48 dBA
ProCare	Yes
All-In-One Tablet Function	Yes
1/2 Load Function	Yes
Sanitize Function	Yes
ExtraRinse Function	Yes
Rapid Clean Function	Yes
PROGRA	AMS
Number of Programs	5
Pots and Pans Plus	Yes
Regular Wash	Yes
Express Dry	Yes
Quick Wash	Yes
DISPL	AY
Program Sequence	Yes/Digital Display
Rinse Aid Indicator	Yes
RACK SYS	STEM
Cutlery Basket	Sliding
Upper Rack (Inset Shelves)	2
FlexiRack, adjustable Upper Rack	Unloaded
Nylon Coated Racks	Yes
DIMENSI	IONS
H x W x D, in.	33 ½ x 23 ½ x 22 ½ in.
Product Weight	80.5 lbs.
H x W x D, cm	86.1 x 59.8 x 57 cm
Product Weight, kg	36.5 kg
ENVIRONMENTAL	STANDARDS
Energy Consumption, kWh/year	234
	3.5 - 5.0



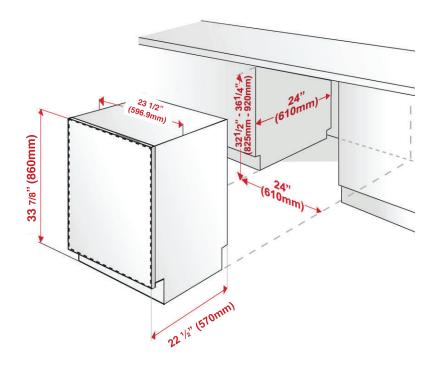

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko U.S., Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website at www.BlombergAppliances.com or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.

IN HARMONY WITH NATURE, YOUR LIFE, AND YOU.



Samsung Dishwasher with Integrated Digital Touch Controls



Signature Features

Easy Check & Control

Take control with just one touch using an Ergonomic Hidden Touch Control panel with soft touch control technology.

Adjustable Rack

Height adjustable upper rack makes it easy to accommodate various dishware shapes and sizes.

Stainless Steel Door

The interior door is covered with stainless steel that's more durable.

One Hour Wash & Dry

Free up your time by getting dishes clean and dry much faster with the Express 60' cycle.

Available Colours



Stainless Steel



White



Digital Touch Controls



Stainless Steel Interior Door

Features

- Fully Integrated Top Control
- Advanced Wash System
- Touch Control
- 4 Wash Cycles
- 5 Options
- 14 Place Settings
- 53 dBA Noise Level

Convenience

- Control Lock
- Delay Start
- Height-Adjustable Upper Rack
- Smart Leak Sensor

Rating




 ENERGY STAR® 7.0 - Rated 239 kWh/yr


SAMSUNG

Samsung Dishwasher with Integrated Digital Touch Controls

Product Dimensions

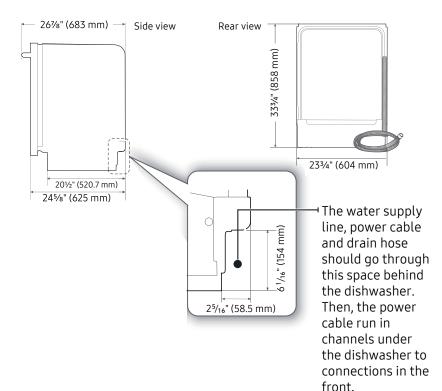

Enclosure Dimensions



This dishwasher is designed to be enclosed on the top and on both sides by a standard residential kitchen cabinet unit.

The installation enclosure must be clean and free of any obstructions. The enclosure must be at least 24 inches wide, 24 inches deep and $34^{1}/_{8}$ inches high.

For the front door of the dishwasher to be flush with the leading edge of the counter top, the counter top must be at least 25 inches deep.

Features

• 4 Wash Cycles:

Auto, Normal, Heavy, Express 60

• 5 Options:

Hi-Temp Wash, Sanitize (Anti-Bacterial-NSF), Delay Start, Control Lock, Heated Dry

Convenience

Control Lock
Digital Water Leakage Sensor
Height-Adjustable Upper Rack
Polypropylene Racking
Silverware Basket

Fingerprint Resistant (Available on the DW80CG4021SR model)

Warranty

One (1) Year All Parts and Labour

Product Dimensions & Weight (WxHxD)

Dimensions: $23^3/_4$ " x $33^3/_4$ " x $24^5/_8$ "

Weight: 64 lb (29 kg)

Shipping Dimensions & Weight (WxHxD)

Dimensions: 26.13" X 35" x 29.13" Weight: 77.162 lb (35 kg)

 Colour
 Model #
 UPC

 Stainless Steel
 DW80CG4021SR
 887276772882

 White
 DW80CG4021WQ
 887276772899